




FACING BARS

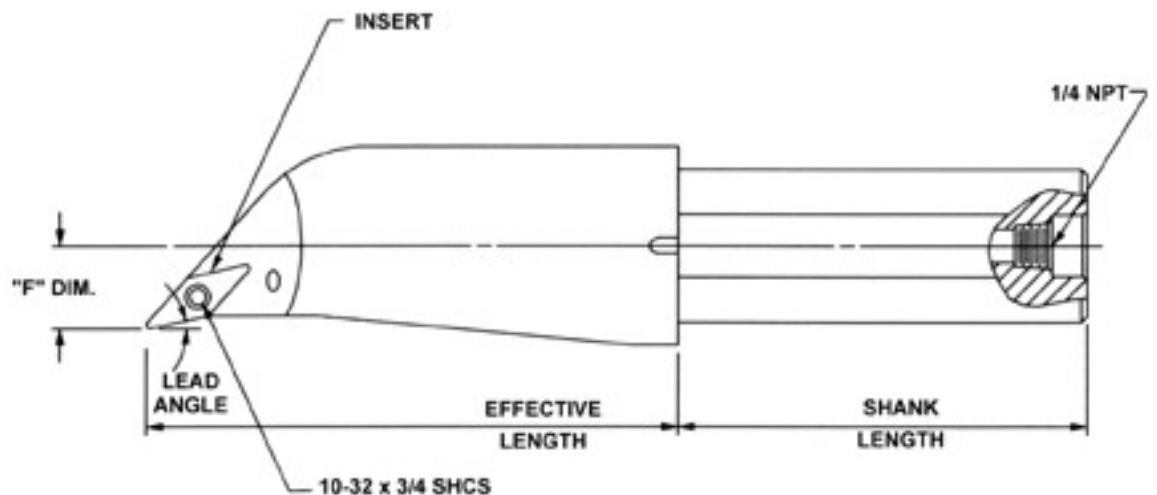

| PRODUCT | PART NO. | INSERT TYPE | SHANK DIA | SHANK LENGTH | EFFECTIVE LENGTH | "F" DIM | LEAD ANGLE | INSERT SCREW | O RING |
|------------------------------------------|-----------------|-----------------------------|-----------|--------------|------------------|---------|------------|------------------|--------|
| 40MM. DIA. SHANK | | | | | | | | | |
| FACING | MTNH-SMM-417R | VPGA/Z 443 CARBIDE OR PCD | 40MM | 4.000 | 4.500 | 1.000 | -12.5° | 10-32 x 3/4 SHCS | N/A |
| FACING | MTNH-SMM-418R | VPGA/Z 443 CARBIDE OR PCD | 40MM | 4.000 | 4.500 | 1.000 | -22.0° | 10-32 x 3/4 SHCS | N/A |
| 2.0" DIA. SHANK-INT. COOL.PORT | | | | | | | | | |
| FACING | TNH-SRG-305R | VPGA/Z 443 CARBIDE OR PCD | 2.000 | 5.000 | 6.500 | 1.000 | -5.0° | 10-32 x 3/4 SHCS | N/A |
| FACING | TNH-SRG-317R/L | VPGA/Z 443 CARBIDE OR PCD | 2.000 | 5.000 | 6.500 | 1.000 | -12.5° | 10-32 x 3/4 SHCS | N/A |
| FACING | TNH-SRG-321R | GIDA-5.0-2.5 CARBIDE OR PCD | 2.000 | 5.000 | 4.000 | 0.900 | -0.0° | 10-32 x 3/4 SHCS | N/A |
| FACING | TNH-SRG-327R/L | VPGA/Z 443 CARBIDE OR PCD | 2.000 | 5.000 | 6.500 | 0.875 | -27.5° | 10-32 x 3/4 SHCS | N/A |
| FACING | TNH-SRG-337R | VPGA/Z 443 CARBIDE OR PCD | 2.000 | 5.000 | 8.500 | 1.000 | -12.5° | 10-32 x 3/4 SHCS | N/A |
| 2.5" DIA. SHANK-O.D. O-RING SEAL | | | | | | | | | |
| FACING | TNK-SKG-217R/L | VPGA/Z 443 CARBIDE OR PCD | 2.500 | 5.000 | 6.500 | 1.500 | -12.5° | 10-32 x 3/4 SHCS | 141 |
| 63MM. DIA. SHANK-O.D. O-RING SEAL | | | | | | | | | |
| FACING | MTNK-SKG-217R/L | VPGA/Z 443 CARBIDE OR PCD | 63MM | 5.000 | 6.500 | 1.500 | -12.5° | 10-32 x 3/4 SHCS | 140 |

ASI WORKHOLDING, INC.

1258 Fendt Drive, Howell, MI 48843 517-540-0400 Fax: 517-540-0375 toolsales@asichuck.com